



Bulb Cross Reference Chart

For Incandescent Bulb and Fluorescent Tube Replacement

Exclusively
Kaperll
Products



| Part # | 25 Unit Bulk # | Description | Picture | Temperature | Wattage Equiv. | Base | Replacement Bulb Photo & Replacement Nos. |
|----------|----------------|--|---------|-------------|----------------|--------|---|
| 65602 | 65602BLK | 15 Diode 1141/1156 Overhead Replacement 135 Lumen | | 5500 Kelvin | 12 | | 93, 1003, 1141, 1156 1139IF 1143IF 1141LL |
| 65602-WW | | Warm White version | | 3500 Kelvin | 12 | | |
| 65532 | 65532BLK | 25 Diode 1141/1156 Overhead Replacement 175 Lumen | | 5500 Kelvin | 20 | | |
| 65532-WW | | Warm White version | | 3500 Kelvin | 20 | | |
| 52533 | 52533BLK | 19 Diode 11/41/1156 Reading Directional 135 Lumen | | 5500 Kelvin | 12 | | |
| 52533-WW | | Warm White version | | 3500 Kelvin | 12 | | |
| 52623 | 52623BLK | 13 Diode Multidirectional 1141/1156 - side mount 215 Lumen | | 5500 Kelvin | 20 | BA15S | |
| 52623-WW | | Warm White version | | 3500 Kelvin | 20 | | |
| 52625 | 52625BLK | Single Diode High Intensity LED Chip for deep socket reading. 210 Lumen | | 5500 Kelvin | 19.5 | | 1383, 1383 20-99 |
| 52625-WW | | Warm White version | | 3500 Kelvin | 19.5 | | |
| 52615 | 52615BLK | 20-99 Vanity or Décor Bulb 1 watt 100 Lumens | | 5500 Kelvin | 15 | | |
| 52616 | 52616BLK | 20-99 Vanity or Décor Bulb 3 watt 215 Lumens | | 5500 Kelvin | 25 | | |
| 65601 | 65601BLK | 15 Diode 906/921 Overhead Replacement 135 Lumen | | 5500 Kelvin | 12 | Wedge | 161, 168, 194, 906, 921 |
| 65061-WW | | Warm White version | | 3500 Kelvin | 12 | | |
| 65432 | 65432BLK | 25 Diode 906/921 Overhead Replacement 175 Lumen | | 5500 Kelvin | 20 | | |
| 65432-WW | | Warm White version | | 3500 Kelvin | 20 | | |
| 52609 | 52609BLK | 13 Diode Multidirectional 906/921 for side mount 215 Lumen | | 5500 Kelvin | 16 | | |
| 52609-WW | | Warm White version | | 3500 Kelvin | 16 | | |
| 52610 | 52610BLK | 5 Diode Multidirectional 194 for all mount types 140 Lumen | | 5500 Kelvin | 5 | | |
| 52610-WW | | Warm White version | | 3500 Kelvin | 5 | | |
| 52617 | | Single Diode High Intensity LED chip for 906/921 overhead directional applications. 200 Lumen | | 5500 Kelvin | 19.5 | | |
| 52622 | 52622BLK | 13 Diode Multidirectional 1076 for side mount 215 Lumen | | 5500 Kelvin | 20 | | 1004, 1076 1156LL, 1157LL |
| 52622-WW | | Warm White version | | 3500 Kelvin | 20 | | |
| 52624 | 52624BLK | 13 Diode Multidirectional 1157 for all mount types. 215 Lumen | | 5500 Kelvin | 20 | BAY15D | |

| Part # | 25 Unit Bulk # | Description | Picture | Temperature | Wattage Equiv. | Base | Replacement Bulb Photo & Replacement Nos. |
|----------|------------------|--|-------------|-------------|----------------|----------|---|
| 52626 | 52626BLK | 9 Diode G-4 Disc Overhead Directional Side Pin Mount. 180 Lumen | | 5500 Kelvin | 10 | | |
| 52626-WW | | Warm White version | | 3500 Kelvin | 10 | | |
| 52611 | 52611BLK | 9 Diode Multidirectional G-4 Tower for all mount types. 180 Lumen | | 5500 Kelvin | 10 | G-4 | |
| 52611-WW | | Warm White version | | 3500 Kelvin | 10 | | |
| 52620 | 52620BLK | COB Diode Chip G-4 Side Pin Mount High Output. 210 Lumen | | 5500 Kelvin | 20 | | |
| 52620-WW | | Warm White version | | 3500 Kelvin | 20 | | |
| 52614 | 52614BLK | 9 Diode G-4 Disc Overhead Directional Back Pin Mount. 180 Lumen | | 5500 Kelvin | 10 | | |
| 52618 | 52618BLK | 9 Diode G-6 Multidirectional tower bulb for all types. 180 lumen | | 5500 Kelvin | 20 | | |
| 52627 | 52627BLK | 9 Diode 211-214 Mount Directional 180 Lumen | | 5500 Kelvin | 10 | | |
| 52628 | | 2 Diode Festoon 211-214 Mount Directional 30 Lumen | | 5500 Kelvin | 5 | | |
| 52621 | 52621BLK | Multidiode E17 base bulb for microwaves, fan lights, or any medium spiral base applications. 110v, 305 lumens. | | 5500 Kelvin | 40 | | |
| 52612 | 52612BLK (15 pk) | T5 - 12 Inch Fluorescent Tube 39 Diode 400 Lumen | | 5500 Kelvin | 10 | | |
| 52612-WW | | Warm White version | | 3500 Kelvin | 10 | | |
| 52613 | 52613BLK (15 pk) | T8-18 inch Fluorescent Tube 66 Diode 720 Lumen | | 5500 Kelvin | 15 | Mini Pin | |
| 52613-WW | | Warm White version | 3500 Kelvin | 15 | | | |


50,000
Hour Lifetime Rating



www.dg-usa.com
1-800-456-4498



Exclusively
Kaper II
Products

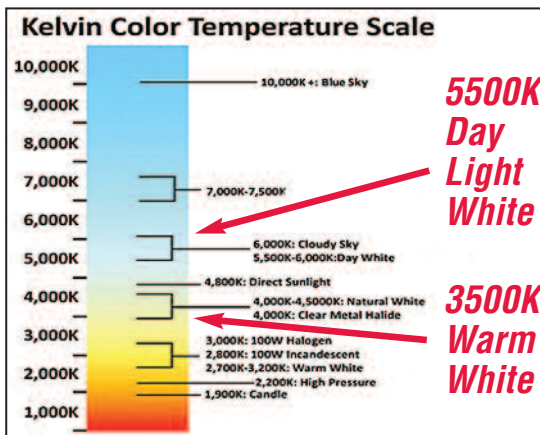

Go Green

Use less power
Brighten your life

Reduce Cooling Loads

Reduce Battery Power Consumption

Incandescent 200° LED 78°

Incandescent LED

Diamond has all your LED Lighting Needs Covered!

